



COREtec®

the Original

The essentials

STONE
collection

COREtec[®]

the Original

PRESENTS

STONE

collection

The best
click and lock floor ever!

SOUND
core

• THE WORLD'S #1 •

COREtec[®]

the Original

BEST SELLING MULTILAYER FLOOR

100%
WATER
PROOF

Weathered Concrete
50-LVT-1803



100% WATERPROOF

100% résistant à l'eau / 100% Wasserfest / 100% Watervast
100% resistente al agua / 100% resistente all'acqua



WILL NOT EXPAND OR CONTRACT

Extrêmement stable / Extrem stabil / Extrem stabil
No se expande ni se contrae / Non dilata o restringe



NO ACCLIMATIZATION NECESSARY

Pas besoin d'acclimatation / Keine Akklimatisierung
benötigt / Geen acclimatisatie nodig / No necessita
aclimatación / Non necessita di acclimatazione



EASY TO INSTALL

Pose facile / Einfache Verlegung
Plaatst eenvoudig
Fácil de instalar / Facile da installare



REDUCES NOISE

Silencieux / Schalldämmend /
Akoestisch dempend / Reduce el ruido
Riduce il rumore



PET PROOF

Adapté aux animaux domestiques
Geeignet für Haustiere



INSTALLATION ON ANY SURFACE

Compatible toutes surfaces / Sofort auf bestehende Hartböden
Op elke ondergrond / Instalación en cualquier superficie
Può essere installato su ogni superficie esistente



SUPERIOR SCRATCH RESISTANCE

Résistant aux rayures / Hohe Kratzfestigkeit
Hoge krasweerstand / Alta resistencia a la abrasión
Elevata resistenza ai graffi




ELECTROSTATIC PERFORMANCE

Accumulation de charges électrostatiques / Antistatisch
Electrostatiche propensiteit / Rendimiento electrostático
Performance elettrostatica



SUITABLE FOR UNDERFLOOR HEATING & COOLING

Compatible sur sol chauffant & refroidissant / Geeignet für Bodenheizung & Kühlung
Ideaal voor vloerverwarming & koeling / Adecuado para calefacción por suelo
radiante y refrigeración / Adatto a riscaldamento a pavimento e raffreddamento



abZ: Z-156.610-1695



Lyra
50-LVTE-1857

Carina
50-LVTE-1852

STONE+

4 V-GROOVE



8,00 mm




0,55 mm



457 x 610 mm







**100%
WATER
PROOF**

Ara
50-LVTE-1851



Indus
50-LVTE-1856



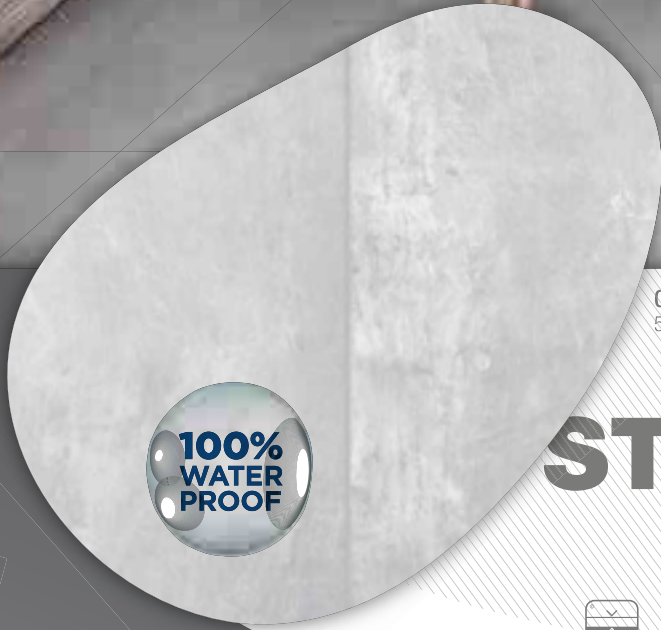

Columba
50-LVTE-1853

STONE+

4 V-GROOVE



8,00 mm



0,55 mm



457 x 610 mm



Aquila
50-LVTE-1850

100%
WATER
PROOF





100%
WATER
PROOF

Hydra
50-LVTE-1855

Mensa
50-LVTE-1858

STONE+

4 V-GROOVE



8,00 mm



0,55 mm



457 x 610 mm



100%
WATER
PROOF


100%
WATER
PROCE

Vela
50-LVTE-1854



100%
WATER
PROOF

A Petrified Forest
50-LVT-1801

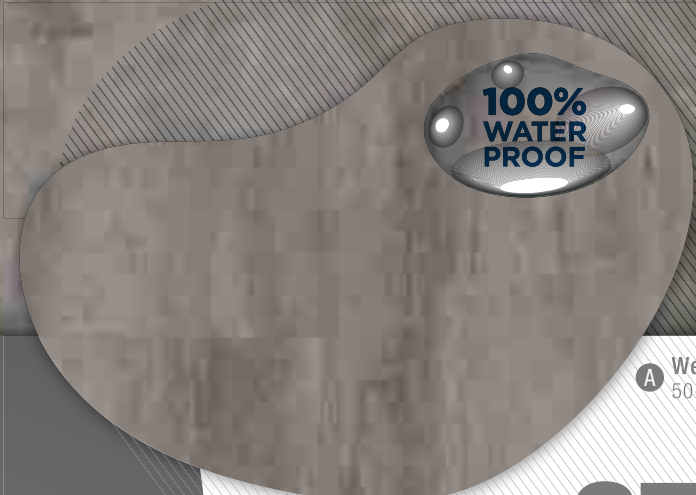

A Weathered Concrete
50-LVT-1803

STONE



8,00 mm



0,55 mm



A 470 x 610 mm


B 305 x 610 mm

Ankara Travertine **B**
50-LVT-104






1

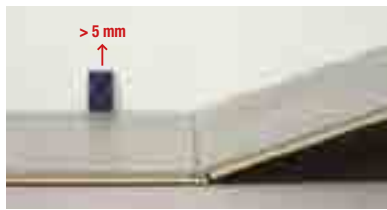

2

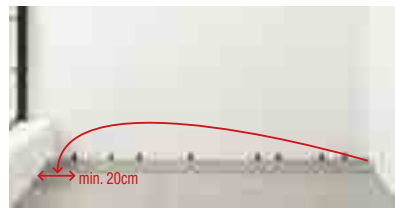

3



4



5



6



7



8



9



10





Maintenance

Daily cleaner, deep cleaner & stain remover




Accessories

Design (2pc's)
H: 7cm / L: 240cm



70SK3 **9605** X

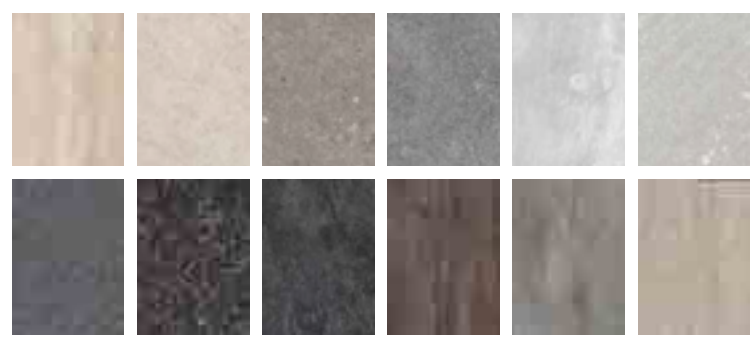





Identical Colors and Pattern / Couleurs et décors identiques
Gleiche Farbe und Design / Identieke kleur en design
Colores y patrones idénticos / Identici colori e finiture

STONE

collection

PRODUCT INFORMATION

INFORMATION PRODUIT / PRODUKTDATEN / PRODUCTINFORMATIE
INFORMACIÓN DEL PRODUCTO / INFORMAZIONI SUL PRODOTTO

STONE+	STONE	8 mm	0,55 mm
 457 x 610 mm 2,23 m ² /box 71,36 m ² /pallet  4 V-GROOVE 8 pcs/box · 18,8 kg/box	 470 x 610 mm 2,87 m ² /box 114,80 m ² /pallet 10 pcs/box · 23 kg/box	 305 x 610 mm 2,98 m ² /box 125,16 m ² /pallet 16 pcs/box · 23,7 kg/box	



Level of use: 33 - 42 (EN ISO 10874)

Classe d'usage | Nutzungsklasse | Gebruiksklasse | Clasificación de uso | Classe d'uso

Inflammability: Bfl-S1 (EN 13501)

Classement feu | Brandverhalten | Brandklasse | Resistencia al fuego | Classe di resistenza al fuoco

Scratch resistance: Class T (EN 660-2)

Résistance aux rayures | Verschleissverhalten | Krasvastheid | Resistencia a la abrasión | Resistenza ai graffi

Squareness and straightness: < 0,15mm (EN 24342)

Rectitude des arêtes et de l'équerrage | Massstabilität Rechtheit en rechthoekigheid | Cuadratura y rectitud | Dilatazione

Curling when exposed to heat: < 0,02mm (EN 23999)

Incurvation après exposition à la chaleur | Schüsselung | Krulling onder invloed van warmte | Encorbamiento después de exposición al calor | Incurvamento massimo

Dimensional Stability: < 0,02mm (EN 23999)

Stabilité dimensionnelle | Dimensionsstabilität | Dimensionele stabiliteit | Estabilidad dimensional | Stabilità dimensionale

Electrostatic Performance: < 2 kV (EN 1815)

Accumulation de charges électrostatiques | Antistatik | Electrostatische propensiteit | Rendimiento electroestático | Performance elettrostatica

Slip resistance: DS (EN 13893)

Glissance | Rutschhemmung | Antislip | Coeficiente de fricción | Coefficiente dinamico di attrito

Slip restraint: R10 (DIN 51130)

Résistance au glissement | Rutschhemmung | Slipweerstand | Restricción al resbalamiento | Coeficiente di scivolosità

Formaldehyde group: E1 (EN 717-1)

Classe formaldehyde | Formaldehyd Klassifizierung | Formaldehydklasse | Grupo formaldehído | Classe Formaldeide

Acoustic Insulation: $\Delta L_w = 20$ dB (ISO 717-2)

Efficacité Acoustique | Trittschallverbesserungsmaß | Kontaktgeluidisolatie | Aislamiento acústico | Isolamento acustico

Drum Sound Class (EPLF) = SL50

Castor Chair resistance: Pass (EN 425)

Résistance aux chaises à roulettes | Stuhlrollenbeanspruchung | Bestand tegen stoelwielen | Resistencia a sillas con ruedas | Prova con sedia a ruote

Light fastness: 8 (ISO 105-B02)

Résistance à la lumière | Lichtechtheit | Lichtechtheid | Solidez del color a luz artificial | Resistenza alla luce

Heat insulation: 0,027 (m² K/W) (EN 12667 ISO 8302)

Isolation thermique | Wärmedurchlasswiderstand | Thermische isolatie | Aislamiento térmico | Isolamento al calore

Underfloor heating: Suitable | Adapté | Geeignet | Geschikt | Adecuado | Adatto (EN 12524)

Chauffage par le sol | Bodenheizung | Vloerverwarming | Calefacción por suelo radiante | Riscaldamento a pavimento

Resistance to chemicals: Very good | Très bon | Sehr gut | Zeer goed | Muy bueno | Molto buono (EN 423)

Résistance aux produits chimiques | Chemikalienbeständigkeit | Chemicaliënresistentie | Resistencia a los productos químicos | Resistenza ai prodotti chimici

Residual indentation certified: 0,09 mm (EN ISO 24343-1:2012)

Poinçonnement rémanent certifié | Eindrückverhalten bescheinigt | Restindruk gecertificeerd | Huella residual | Indentazione residua certificat

Warranty (year): Lifetime Residential | 10 Commercial

Garantie (ans) | Garantie (Jahre) | Garantie (jaar) | Garantía (años) | Garanzia (anni)



The warranty covers manufacturing defects and premature wear in the event of normal use.

La garantie couvre les vices de fabrication et l'usure précoce en usage normal.

Die Garantie deckt Herstellungsfehler und vorzeitigem Verschleiß bei normaler Nutzung.

De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik.

La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.

La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.



Aquila
50-LVTE-1850



COREtec[®]
the Original

STONE
collection



 **US FLOORS[®]**
Manufacturer of *Unique and Sustainable* Floors

A DIVISION OF

